



Design characterization of rectangular microstrip patch antenna for Wi-Fi application

Hemant Kumar Varshney, Mukesh Kumar, A.K.Jaiswal and Rohini Saxena

Department of ECE, SHIATS- Allahabad, UP, India.

ARTICLE INFO

Article history:

Received: 22 April 2014;

Received in revised form:

21 August 2014;

Accepted: 29 August 2014;

Keywords

HFSS, Impedance, Radiation Pattern, Return Loss, Smith chart, VSWR.

ABSTRACT

The main aim of the paper is to design and simulate an inset fed rectangular microstrip patch antenna and study the effect of antenna dimension Length (L), Width (W), substrate parameter relative dielectric constant (ϵ_r) substrate thickness (h) and radiation parameters. The result is performed by thickness of 1.57mm of substrate and Rogers RT/duroid 5880 (tm) with dielectric constant of 2.2, S- band frequency 2.4GHz have observed the better result. In the recent years the development in communication systems requires the development of low cost, minimal weight, low profile antennas that are capable of maintaining high performance over a wide spectrum of frequency. This technological trend has focused much effort into the design of a Microstrip patch antenna. The proposed antenna design on different resonant frequencies and analyze the result of all operating frequency between 1GHz to 10GHz, when the proposed antenna designs 2.4GHz operating frequency. At 2.4GHz the verified and tested result has done in Ansoft HFSS version 11. It has observed the Return loss = -30.8 dB, VSWR = 1.05 and directivity = 6.732 dB in this paper. An omnidirectional radiation pattern and stable gain are observed.

© 2014 Elixir All rights reserved.

Introduction

There is an increase in demand for microstrip antennas with improved performance for wireless communication applications are widely used for this purpose because of their planer structure, low profile, light weight moderate efficiency and ease of integration with active device. Almost all the important wireless applications lie in the band starting from 900 MHz to 5.8 GHz. Broadband microstrip patch antennas for the 2.45 GHz ISM band and possible implementation using adhesive copper tape in research scenarios. In the course of the project, two broadband microstrip patch antennas were manufactured to adequately cover the 2.4- 2.5 GHz frequency band.

The mechanism of coupling energy, equivalent circuit diagram and relative merits are discussed in this paper as shown in fig 1. Feeding Techniques are govern by many factors like efficient transfer of power between the radiation structure, feeding structure and their impedance matching . Along with impedance matching are stepped impedance bends, stub function, transition which removes spurious radiation & surface wave loss. These radiations may increase the side lobe & cross polarization amplitude of radiation pattern. Most important factor is to remove the spurious radiation and it effect on radiation pattern is use to evaluate feed. Some feed structures are tends to better performance because of the large no of parameters available. In modern wireless communication systems, Worldwide Interoperability for Microwave Access (WIMAX) has been widely applied in mobile devices such as handheld computers and intelligent phones. This gives users the mobility to move around within a broad coverage area and still be connected to the network.

Feed Techniques

Microstrip patch antennae can be fed by a variety of different methods. The four most popular feed techniques used for the microstrip patch are

- Microstrip line feed
- Co-axial feed

- Aperture coupling
- Proximity coupling

Microstrip line and coaxial probe feeds are contacting scheme, in which RF power directly to the radiating patch. Proximity and Aperture coupled feeds are non contacting schemes, in which electromagnetic field coupling is done to transfer power between the microstrip line and the radiating patch. Feeding techniques are govern by many factors like efficient transfer of power between the radiation structure, feeding structure and their impedance matching .These techniques give a better understanding of design parameters of an antenna and their effect on return losses ,bandwidth ,VSWR and resonant frequency.

Microstrip Line Feed

In this type of feeding technique, a conducting strip connected directly to the edge of the microstrip patch. The conducting strip is smaller in width as compared to the patch and this kind of feed arrangement has the advantage that the feed can be on the same substrate to provide a planar structure. This is an easy feeding scheme, since it provides ease of fabrication and simplicity in modeling as well as impedance matching. However as the thickness of the dielectric substrate being used, increases, surface waves and spurious feed radiation also increases, which hampers the bandwidth of the antenna. The feed radiation also leads to undesired cross polarized radiation.


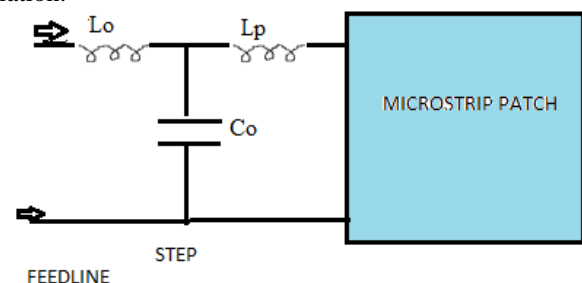


Fig 1. Circuit Diagram of Microstrip Feed

Design Considerations for Rectangular Micro Strip Patch Antenna

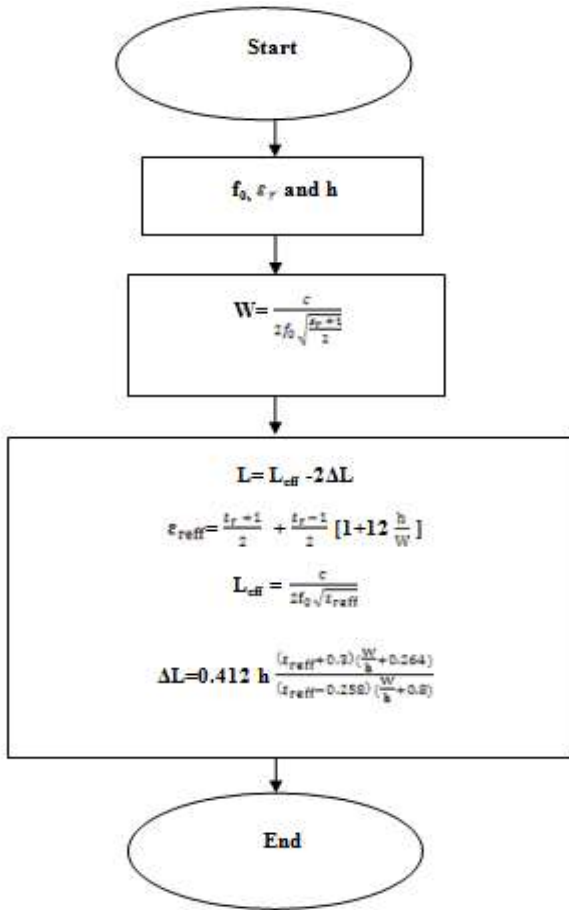

Calculation of the ground plane dimensions (L_g and W_g):

$$L_g = 6h + L \tag{1}$$

$$W_g = 6h + W \tag{2}$$

2.1 Characteristics impedance (Z_0)

When $W/h \geq 1$

$$Z_0 = \sqrt{\epsilon_{reff}} \frac{120 \pi}{\left[\left(\frac{W}{h} \right) + 1.393 + \frac{2}{3} \ln \left\{ \left(\frac{W}{h} \right) + 1.449 \right\} \right]} \tag{3}$$

2.2 VSWR (Voltage Standing Wave Ratio): The VSWR is basically a measure of the impedance mismatch between the feeding system and the antenna. The higher the VSWR the greater is the mismatch. The minimum possible value of VSWR is unity and this corresponds to a perfect match

$$VSWR = \frac{1 + |\Gamma|}{1 - |\Gamma|} \tag{4}$$

$$\Gamma = \frac{V_r}{V_i} = \frac{Z_{in} - Z_s}{Z_{in} + Z_s} \tag{5}$$

- Z_{in} = Input impedance of the antenna,
- Z_s = Source impedance,
- Γ = reflection coefficient,
- V_r = Amplitude of the reflected wave,
- V_i = Amplitude of the incident wave

2.3 Return Loss: RL is a parameter similar to the VSWR to indicate how well the matching is between the feeding system, the transmission lines, and the antenna. The RL is

$$RL = -20 \log |\Gamma| \text{ (dB)} \tag{6}$$

To obtain perfect matching between the feeding system and the antenna, $\Gamma = 0$ is required and therefore, from equation (6), $RL = \infty$. In such a case no power is reflected back. Similarly at $\Gamma = 1$, $RL = 0$ dB, implies that all incident power is reflected. For practical applications a VSWR of 2 is acceptable and this corresponds to a return loss of 9.54 dB.

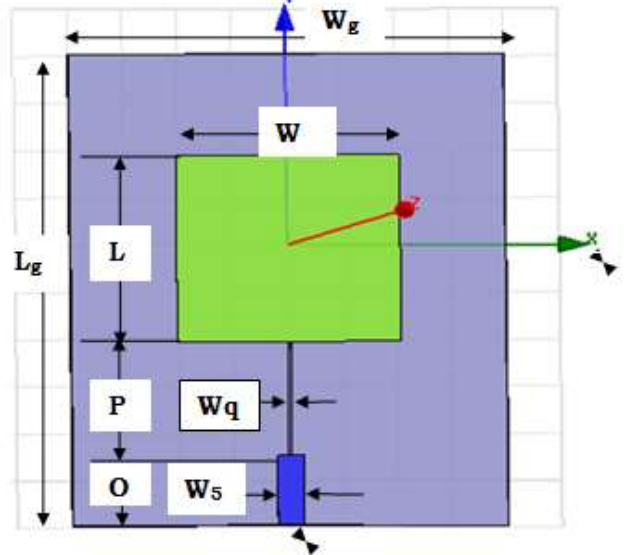


Fig: 2 Rectangular Microstrip Patch Antenna with Line Feed

RMSA i.e. Rectangular microstrip patch antenna is designed in HFSS vs. 11.0 on basically available Rogers RT/duroid 5880 (tm) Substrate of size 100mm X 80mm X 1.57mm and having dielectric constant of 2.2 and loss tangent ($\tan \delta$) = 0.02. in fig 2 shows that radiating copper patch are taken to be 39.56mm X 41.08mm .thickness of copper material is taken as .035mm which is negligible in comparison with 1.57mm thickness of Rogers RT/duroid 5880 (tm) substrate material. Dimension of 50 ohm line are 15mm X 4.84mm X.035mm.dimensions of quarter wavelength line are 24.05mm X .52mm X .035.

Table 1

S.N	Parameters	Parameters value
1.	Patch Length (L)	41.36
2.	Patch Width (W)	49.41
3.	Length of ground (L_g)	80
4.	Width of ground (W_g)	100
5.	Feed Length (O)	15
6.	Feed Width (W_{50})	24.05
7.	Quarter length (P)	4.84
8.	Quarter width (W_q)	0.52
9.	Height (h)	1.57

Simulation Results And Discussion

The software used to model and simulate the rectangular microstrip patch antennae is High Frequency Simulation Software – version 11.0. It has been widely used in the design of RF/wireless antennae, waveguide designs and filters. It can be used to determine and plot the reflection parameters, Voltage Standing Wave Ratio (VSWR), Impedance as well as the radiation patterns. Figure 1 shows the line rectangular feed microstrip patch antenna designed using HFSS version 11.0.

Return Loss

A frequency range of 2-4 GHz is chosen as the resonant frequency which is suitable for S-band applications. Figure 2 S-parameter plot for Return Loss v/s frequency. From the figure it is clear that the return loss at the resonant frequency 2.4 GHz is -30.7991dB.

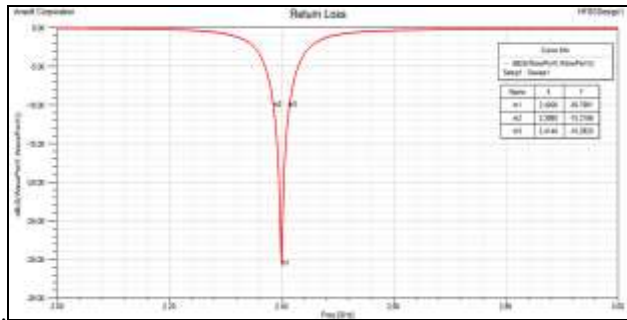


Fig 3. S- parameter plot for Return Loss v/s frequency Radiation Pattern Plots

Since a microstrip patch antenna radiates normal to its patch surface, the elevation pattern for $\phi = 0$ and $\phi = 90$ degrees would be important. Figure 3 and figure 4 shows the gain plot for line feed technique .

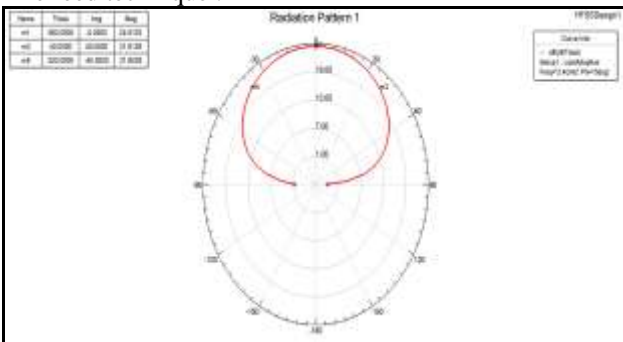


Fig 4. Total gain frequency 2.4 GHz Phi=0 deg

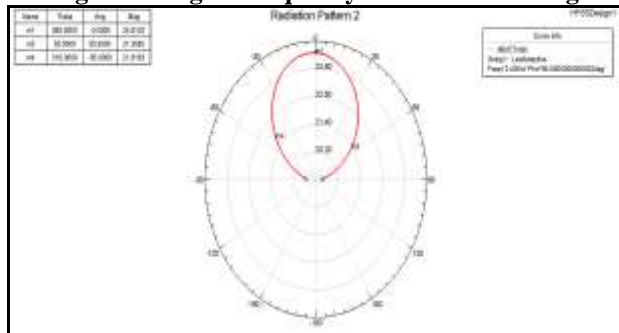


Fig 5. Total gain frequency 2.4 GHz Phi=90 deg

Figure 6, 3D gain clearly showing the peak value of gain of antenna for strip feed $6.7324e+000$ dB. Basically for appropriate design antenna gain should lie in the range of 6 -8 dB.

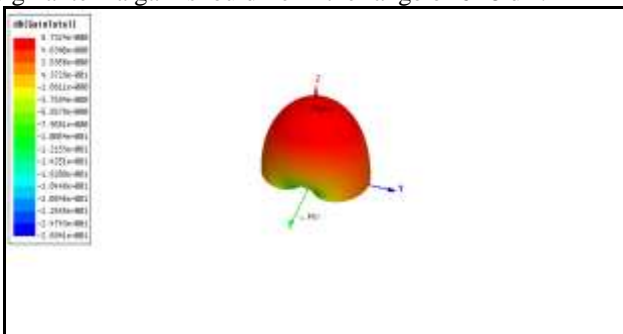


Fig 6. The 3 D Radiation pattern of RMPA

Impedance

The theory of maximum power transfer states that for the transfer of maximum power from a source with fixed internal impedance to the load, the impedance of the load must be the same of the source. The following are the impedance plot. Figure 7 shows impedance plot for the line feed.

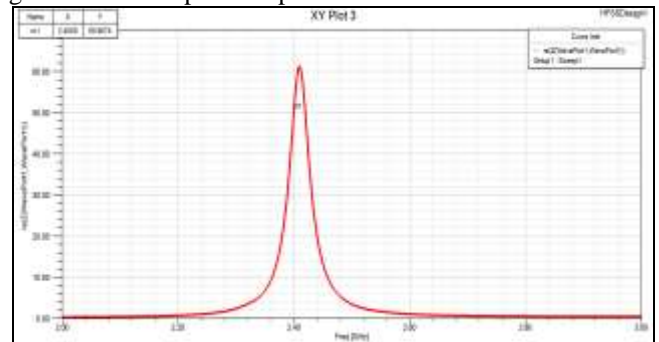


Fig 7. Impedance versus frequency plot

VSWR

When a transmitter is connected to an antenna by a feed line, the impedance of the antenna and feed line must match exactly for maximum possible energy transfer from the feed line to the antenna. When an antenna and feed line do not have matching impedances, some of the electrical energy cannot be transferred from the feed line to the antenna. Energy not transferred to the antenna is reflected back towards the transmitter. It is the interaction of these reflected waves with forward waves which causes standing wave patterns. Ideally, VSWR must lie in the range of 1-2.

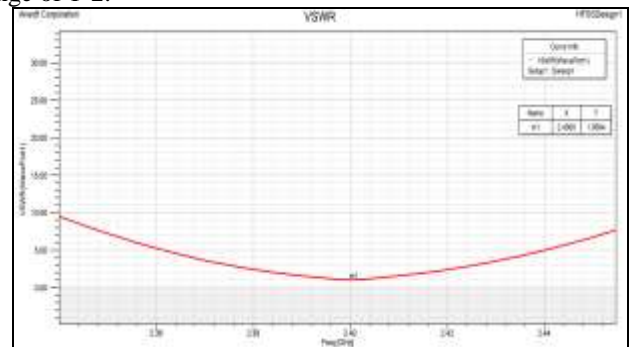


Fig 8. VSWR v/s frequency plot of Rectangular Microstrip Patch Antenna

Figure 9 shows the omnidirectional radiation pattern of patch.

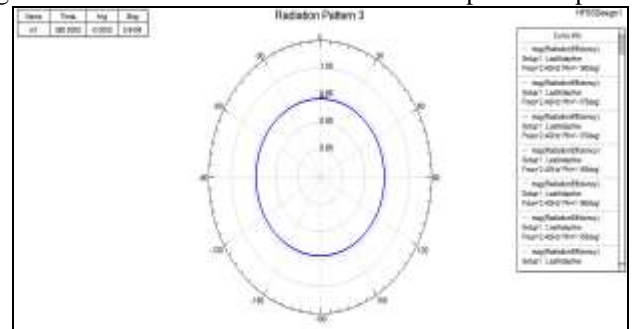


Figure 9. gain v/s frequency plot for different value of phi. Smith Chart

Figure 10 clearly shows that normalized impedance has obtained 1.0027, which is closely to normalized impedance 1, that means 50 ohm resistance. It can be observed from this value the proper impedance matching obtained, so it can say that proper transmission will be occur.

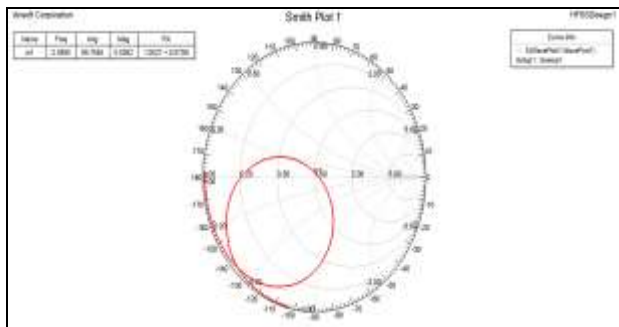


Fig 10. Plot of smith chart

Conclusions

- 1) In this work different parameters such as return loss, vswr, input impedance, radiation pattern and smith chart have been studied in the rectangular microstrip patch antenna operating in 2.4 GHz .
- 2) Incident power must be 10mW to 20mW input impedance of antenna should be 50ohm. This work suggests that the proposed antennas configurations provide a light-weight, compact, low cost and better signal strength in horizontal direction compared to the regular microstrip patch antenna.
- 3) These antennas present an excellent candidate for emerging wireless communications at 2.4 GHz frequency that require a transfer of amount of data in rapid bursts, which include Bluetooth and Wi-Fi (802.11) .
- 4) In the design the RL is -30.0294 dB in Microstrip feed line technique.
- 5) The VSWR for the design performed in the project has a good value of 1.05 (Microstrip feed line) as we can say the level of mismatch is not so high.
- 6) Taking all this in to consideration we can say that there are many aspects that affect the performance of the antenna. Dimensions, selection of the substrate, feed technique and also the Operating frequency can take their position in effecting the performance.

References

- [1] Ajay singh, Raj Gussain, S.C. Gupta, Sandeep Vijay, Comparative Study Of Return-Loss For Single And Dual Inset-Fed Microstrip Antenna, Conference on Advances in Communication and Control Systems, 2013 .
- [2] Amit kumar Jaspreet kaur Rajinder singh, Performance analysis of different feeding technique, vol 3 issue 3 (march 2013) .
- [3] Brajlata Chauhan sandeep vijay S C Gupta Comparative analysis of Microstrip Patch Antenna using different substrate and observe effect of changing parameter at 5.4 GHz, Conference on Advances in Communication and Control Systems 2013 (CAC2S 2013) .
- [4] C.A. Balanis, Antenna Theory Analysis And Design, Second Edition, John Wiley & Sons. Ramesh Garg, Prakash Bharti, Inder Bahl, Apisak Illipiboon, Microstrip Antenna Design Handbook, 2001 pp.1-68, 253-316 Artec House Inc. Norwood, MA .
- [5] D.M. Pozar, b. Kaufman, Increasing The Bandwidth of A Microstrip Antenna By Proximity Coupling, (Electronics Letters 9th April 1987) vol.23 NO.8, pp368-369.
- [6] David m. Pozar and Susanne M. Voda, A Rigorous Analysis of a Microstrip line fed patch antenna, (IEEE Transaction on Antenna and Propagation December 1987), vol.35, no.12, pp. 1343-1350.
- [7] Deepak Kumar , Tejvir Singh , Hema Singh A Comparison Of CPW/Micro Strip-Fed For Monopole Square-Ring UWB Antenna International Journal Of IJAE 2 (2012) 103-107.
- [8] Devan Bhalla And Krishan Bansal, Design of a Rectangular Microstrip Patch Antenna Using Inset Feed Technique IOSR Journal of Electronics and Communication Engineering (IOSR-JECE) e-ISSN: 2278-2834, p-ISSN: 2278-8735. Volume 7, Issue 4 (Sep. - Oct. 2013), PP 08-13.
- [9] D. Mitra, D. Das, and S. R. Bhadra Chaudhuri , Bandwidth Enhancement Of Microstrip Line And Cpw-Fed Asymmetrical Slot Antennas Progress In Electromagnetics Research Letters, Vol. 32, 69-79, (2012).
- [10] Fouzi Harrou, Abdelwahab Tassadit, Analysis and Synthesis of Rectangular Microstrip Antenna, Journal of Modelling and Simulation of Systems (2010) vol 1 Issue 1 pp. 34-39.
- [11] John R. Ojha Marc Peters and Igor Mini, Patch Antennas and Microstrip Lines, microwave and millimeter wave technologies modern uwb antennas and equipment ISBN: 978-953-7619-67-1, (March, 2010) .
- [12] K. Praveen Kumar, K. Sanjeeva Rao, T. Sumanth, N. Mohana Rao, R. Anil Kumar, Y. Harish, Effect of Feeding Techniques on the Radiation Characteristics of Patch Antenna: Design and Analysis International Journal of Advanced Research in Computer and Communication Engineering Vol. 2, Issue 2, (February 2013).
- [13] MA Michael Civerolo, Aperture Coupled Patch Antenna Design Methods , M.S. Thesis, California Polytechnic State University, 2011.
- [14] Md. Maruf Ahamed, Kishore Bhowmik, Abdulla Al Suman, Analysis And Design Of Rectangular Microstrip Patch Antenna On Different Resonant Frequencies For Pervasive Wireless Communication Ictact Journal On Communication Technology, March 2013, Volume: 04, Issue: 01 .
- [15] Pamela R. Haddad and David M. Pozar, Analysis Of An Aperture Coupled Microstrip Patch Antenna With A Thick Ground Plane, (Antenna and Propagation Society International symposium, June 1994), vol.2, pp.932-935.
- [16] P.V. Subbaiah, R.S. Rao, Microstrip and Slot Antennas, Handbook of Antennas And Wave Propagation (2001, Scitech Publications pvt. Ltd India). pp 10.4-10.8.
- [17] R. Divya And M. Priya Design And Characterization Of E-Shape Microstrip Patch Antenna For Wireless Communication International Journal Of Scientific & Technology Research Volume 1, Issue 5, June 2012 Issn 2277-8616 108 .
- [18] Ramesh Garg, Prakash Bharti, Inder Bahl, Apisak Illipiboon, Microstrip Antenna Design Handbook, 2001 pp.1-68, 253-316 Artec House Inc. Norwood .
- [19] Rajesh Kumar Vishwakarma, Sanjay Tiwari, Aperture Coupled Microstrip Antenna for Dual-Band , Wireless Engineering and Technology vol 2, 93-101 (2011).
- [20] Salman Haider, Lindsay and Michael Neve, microstrip patch antennas for broadband indoor wireless systems The University of Auckland (2003) .
- [21] S. Sadat, M. Fardis, Gh. Dadashzadeh , R. K Bae, Proximity Couple Microstrip Patch Antenna Miniaturization Using New Fractal Geometry, Antennas and Propagation Society International symposium, 2005 IEEE, vol.3A, July 2005, pp.262 - 265.