



Comprehending the practice of hydrocarbon identification and Lithological evaluation using Mud Log

Molua O. Collins

Physics Department College of Education, Agbor-Delta State.

ARTICLE INFO

Article history:

Received: 23 February 2012;

Received in revised form:

15 April 2012;

Accepted: 24 April 2012;

Keywords

Onyia,
Hydrocarbon.
Mudlog,
lithology,
Exploration.

ABSTRACT

A hydrocarbon well log (Onyia well), obtained from the Niger Delta region of Nigeria. Was analyzed. The equipment used –Shale shakers log chart, detectors etc and parameters-rate of penetration (ROP), weight on bits (WOB) and strokes per minute (SPM). All provided evidences of the benefits of mudlogging as an exploration tool. The shows, stains and fluorescence obtained from the lithological analyses of zones of interest, from the Mudlog, ie 7100-8,300ft of well, after through examination indicated that the lithologies reached. and in some cases the availability of hydrocarbon in the reached zones.

© 2012 Elixir All rights reserved.

Introduction

Mud logging, also known as hydrocarbon well logging, is the creation of a detailed record (well log) of a borehole by examining the bits of rock or sediment brought to the surface by the circulating drilling medium (most commonly mud). Mud logging is usually performed by a third-party mud logging company. This provides well owners and producers with information about the litho logy and fluid content of the borehole while drilling. Historically it is the earliest type of well log. Under some circumstances compressed air is employed as a circulating fluid, rather than mud. Although most commonly used in petroleum exploration, mud logging is also sometimes used when drilling water wells and in other mineral exploration, where drilling fluid is the circulating medium used to lift cuttings out of the hole. In hydrocarbon exploration, hydrocarbon surface gas detectors record the level of natural gas brought up in the mud. A mobile laboratory is situated by the mud logging company near the drilling rig or on deck of an offshore drilling rig, or on a drill ship.

Mud logging includes observation and microscopic examination of drill cuttings (formation rock chips), and evaluation of gas hydrocarbon and its constituents, basic chemical and mechanical parameters of drilling fluid or drilling mud (such as chlorides and temperature), as well as compiling other information about the drilling parameters. Then data is plotted on a graphic log called a mud log.

Other real-time drilling parameters that may be compiled include, but are not limited to; rate of penetration (ROP) of the bit (sometimes called the drill rate), pump rate (quantity of fluid being pumped), pump pressure, weight on bit, drill string weight, rotary speed, rotary torque, RPM (Revolutions Per Minute), SPM (Strokes Per Minute) mud volumes, mud weight and mud viscosity. This information is usually obtained by attaching *monitoring devices* to the drilling rig's equipment with a few exceptions such as the mud weight and mud viscosity

which are measured by the derrick hand or the mud engineer. (Loermans and Touati; (2003).

Rate of drilling is affected by the pressure of the column of mud in the borehole and its relative counterbalance to the internal pore pressures of the encountered rock. A rock pressure greater than the mud fluid will tend to cause rock fragments to spall as it is cut and can increase the drilling rate. "D-exponents" are mathematical trend lines which estimate this internal pressure. Thus both visual evidence of spalling and mathematical plotting assist in formulating recommendations for optimum drilling mud densities for both safety (blowout prevention) and economics. (Faster drilling is generally preferred.)

Mud logging is often written as a single word "mudlogging". The finished product can be called a "mud log" or "mudlog". The occupational description is "mud logger" or "mudlogger". In most cases, the two word usage seems to be more common. The mud log provides a reliable *time log* of drilled formations. A Mudlog schematic is shown in fig 3.


Stratigraphy Of The Studied Area

The Niger Delta formation is divided into three stratigraphic units. The Benin formation forms the uppermost unit of the delta complex. It consists of fresh water bearing massive continental sands and gravels deposited in an upper deltaic plain environment. The Benin formation is the thickest unit in the central area of the Niger Delta.

Immediately below the Benin formation is the Agbada formation, which consists of alternation of sands and shales of paralic origin. The sandstones are very coarse to fine grained, well to poorly sorted and generally unconsolidated. The shales are light to dark grey, and become more indurated with depth

According to Ejedawe et. al (1984), the thickness of the Agbada formation ranges from 9000 – 14000ft. The basal unit of the Niger Delta is the Akata formation which is composed mainly of marine shales, deposited as the high energy delta

overpressured zones and estimate fracture gradients, detection and estimation of the potential of hydrocarbon zones. Such as oil-in-place, reservoir management and reassessment.

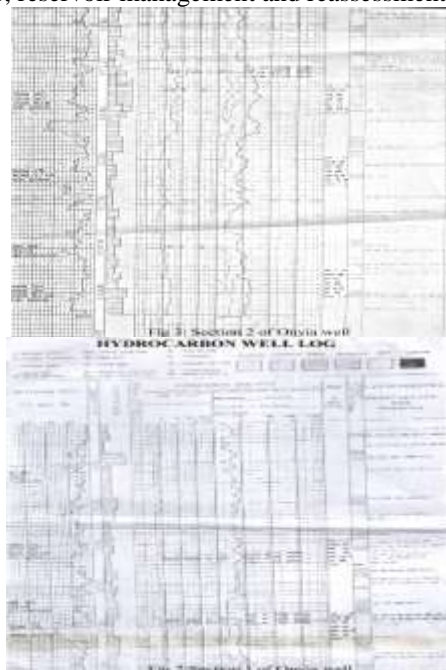

References

- American Association of Petroleum geologists, 1985. Bulletin Vol.69 No 8 pgs 1305-1310.
- Baroid logging system designs manual, 1995. 1744-1751.
- Bill Donovan, p.e.(2007). Automated mudlogging systems 780 e. Phillips dr. S. Littleton, co 80122
- Ejedawe, J.E., Coker, S.J.L., Lambert-Aikhionbare, D.O., Alofe, K.B., and Adoh, F.O., 1984, Evolution of oil-generative window and oil and gas occurrence in Tertiary Niger Delta Basin: Loermans and Touati; (2003). Archie's dream ... and beyond:Advanced Mud Logging (AML); SPE Technical Symposium, Dhahran, Saudi Arabia;
- Olear, S.I (1992): Structural Geology and Hydrocarbon Trapping in the Niger Delta. SPE continuing Education Seminar Shell Warri Nigeria.
- Short, K. C. and Stauble, A. J (1967): Outline of Geology of Niger Delta. Am Assoc. Petroleum Geologists Bull. Vol 51, pp. 761-779.
- Weber, K.J and Daukoru, E (1975): Petroleum geology of the Niger Delta. 9th World Petroleum congress,Tokyo vol. 2 p207-221.

Results, analysis and conclusion

Table1: lithological analysis of zones of interest from the mudlog.

S/N	Depth(ft)	Lithology	Colour	Description
1	7,080-7,100	Shale	Dark Grey	Soft moderately hard Streaky.
2	7,100-7,190	Sand	Light grey-white	Fine-medium sieve size 55, R ₃ -R ₄ .
3	7,190-7,210	Shale	Light grey	Soft moderately hard bulky.
4	7,210-7,280	Sand	white	Fine-medium, R ₃ -R ₄ .
5	7,280-7,290	Shale		
6	7,290-7,310	Sand stone	white	Fine-medium 55, R ₃ -R ₄ spotty; yellow fluorescence, light crush cut fluorescence.
7	7,310-7,365	Sand	white	Fine-medium 55, R ₃ -R ₄ spotty; yellow fluorescence, light crush cut fluorescence.
8	7,365-7,390	Shale	Grey-dark grey	Moderately hard bulky.
9	7,390-7,440	Sand stone	white	Fine-medium S ₇ , R ₃ -R ₅ spotty; yellow fluorescence, milky cut fluorescence.
10	7,440-7,480	Shale	Grey	Moderately hard bulky.
11	7,480-7,530	Sand stone	white	Fine-medium spotty; yellow fluorescence.
12	7,530-7,570	Shale		
13	7,570-7,600	Sand stone	white	Faint yellow crush cut fluorescence
14	7,600-7,630	Shale	Light grey to grey	Soft moderately hard, bulky.
15	7,638-7,660	Sand stone		
16	7,660-7,670	Shale		
17	7,670-7,695	Sand stone	White light grey	Medium size S ₇ , spotty; yellow plus, light yellow crush cut fluorescence.
18	7,695-7,705	Shale	Dark grey to grey	Moderately hard-hard, platy.
19	7,705-7,780	Silt stone	White light grey	Very fine, spotty yellow fluorescence, light yellow fluorescence
20	7,780-7,795	Shale		
21	7,795-7,850	Sand	white	Fine-medium S ₄ (R ₃ -R ₅) (C ₃ gas detected)
22	7,850-7,890	Shale	Grey	Moderate, hard bulky, platy
23	7,890-7,930	Sand	white	Fine-medium (S ₄ ,R ₃ -R ₄ size)
24	7,930-7,945	Shale		
25	7,945-8,010	Sand	white	Fine-medium (C ₁ gas Show)
26	8,010-8,030	Shale	Dark grey-grey	Moderate hard -hard, platy
27	8,030-8,080	Sand stone	white	Fine-medium (S ₄ , R ₃ -R ₄ size)
28	8,080-8,095	Shale		
29	8,095-8,120	Sand	white	Very fine-fine (C ₁ gas show)
30	8,120-8,140	Shale	Light grey to grey	Moderately hard, bulky and platy
31	8,140-8,190	Sand stone	white	Very fine-fine (C ₁ gas show), spotty fluorescence, milky cut fluorescence.
32	8,190-8,210	Shale	Dark grey-grey	Moderately hard, bulky and Streaky.
33	8,210-8,250	Sand	white	Fine (S ₄ ,R ₃ -R ₄ size)