



Measurements of Indoor Radon-222 Concentration inside Iraqi Kurdistan: Case Study in the Summer Season

Zakariya A. Hussein^{1*}, Mohamad S. Jaafar¹ and Asaad H. Ismail²

¹Radiation and Medical Physics, School of Physics, Universiti Sains Malaysia, 11800, Pulau Penang, Malaysia

²Medical Physics, Physics Department, Education College, Salahaddin University-Erbil, 44002, Iraqi Kurdistan, Iraq.

ARTICLE INFO

Article history:

Received: 20 February 2013;

Received in revised form:

17 March 2013;

Accepted: 1 April 2013;

Keywords

CR-39NTDs,

Indoor radon,

Lung cancer, and the hospitals.

ABSTRACT

Exposure to natural sources of radiation, especially ²²²Rn and its short-lived daughter products has become an important issue throughout the world because sustained exposure of humans to indoor radon may cause lung cancer. Therefore, indoor radon concentration levels have been measured inside 8 government hospitals in three main regions (Erbil, Duhok and Sulaymaniya) in Iraqi Kurdistan region during summer season by using CR-39 nuclear track detector. The CR-39 detectors were placed in the all hospitals for three floors (ground, first and second). The highest average radon concentration value and annual effective dose was found to be in the Shaheed Dr.Aso hospital in Sulaymaniya city ($52.89 \pm 3.52 \text{ Bq.m}^{-3}$, $1.37 \pm 0.09 \text{ mSv/y}$) respectively and the lowest was found in the Erbil Teaching hospital in Erbil city ($30.15 \pm 2.85 \text{ Bq.m}^{-3}$, 0.81 mSv/y) respectively, This depended on the geological formation, type of building material, and the floor level. Therefore, the results showed that the average radon concentration and annual effective dose decreases gradually as the floor level increases. The highest and lowest of annual effective dose was found in ground and second floor, respectively. Thus, according to the annual exposure dose data, the workers are safety in most of the hospitals.

© 2013 Elixir All rights reserved.

1. Introduction

Radon (²²²Rn) is a radioactive noble gas emitted by the decay of ²²⁶Ra, an element of the ²³⁸U decay series. Radon-222 decays into a series of other radioactive elements, of which ²¹⁴Po and ²¹⁸Po are the most significant, as they contribute the majority of radiation dose when inhaled. Following a number of decay series, ²¹⁸Po transforms into ²¹⁰Po and it decays into stable ²⁰⁶Pb. The ²²²Rn and its decay products are reported as major causes of lung cancer [1-2]. Assessment of health effects due to exposure to ionizing radiation from natural sources requires knowledge of its distribution in the environment. The estimated global average annual dose of the population receiving natural radiation equals 2.4 mSv [3]. It is well established that the inhalation of radon (²²²Rn) and mainly its radioactive decay products, contributes more than 50% of the total radiation dose to the world population from natural sources [4].

²²²Rn is an alpha emitter that decays with a half-life of 3.8 days into a short-lived series of progeny. A certain fraction of radon progeny may attach to aerosol particles. By inhalation, these particles may be deposited in lungs thereby exposing sensitive tissues with alpha radiation. Consequently, it may lead to lung cancer and has been identified to be the second leading cause of lung cancer [5-6]. In the United States of America, radon alone is reported to be responsible for ~ 15, 000–20,000 lung cancer deaths per year [7]. The risk is reported to be proportional to the radon level down to EPA's action level of 4 pCi l⁻¹ and probably below this level [7-8]. Therefore, in the present study, beside of measure indoor radon concentration, we have measure most of important that related to estimate a risks of inhalation of radon gas by the workers inside the hospitals. Potential alpha energy concentration, equilibrium factor between

radon and its daughter, and the annual effective dose considered important parameters. As well as, and to find variation in radon concentration for three floors ground, first, and second.

2. Material and Methods

2.1 Region surveyed

Iraqi Kurdistan region include three main Governorates Erbil, Sulaymaniya and Duhok and these areas are different from each other by their geographical location and geological formation Fig.1. The regions to be surveyed for ²²²Rn decay product concentrations were selected from a study of appropriate radiological and geological information. The characteristics for those hospitals building materials in general with clay bricks, limestone bricks and cement bricks, with a concrete and iron structure. The walls of the dwelling are often covered with gypsum and several of these materials are expected to contribute significantly to sources of indoor radon.

2.2. Passive radon dosimeter

This is a closed chamber into which radon diffuses. The plastic cup has dimensions of 6 cm diameter and 7 cm high is show in Fig.2. [6]. The technique used in this survey is based on (CR-39) nuclear track detectors (NTDs). Page Moulding, UK, manufactures the detectors. The NTD has an area of $1.5 \times 1.5 \text{ cm}^2$ which is fixed by double-stick tape at the bottom of the dosimeter. In the cover there is a hole covered with a 5-mm thick soft sponge. The design of the chamber ensures that all aerosols and radon decay products are deposited on the soft sponge from the outside and that only radon gas, among other constituents, diffuses through it to the sensitive volume of the chamber. The design of the chamber ensures that the aerosol particles and radon decay products are deposited on the sponge from outside and only radon, among other gases, diffuses

through it to the sensitive volume of the chamber. The calibration process for the dosimeter of this type and dimension was done by Ismail& Jaafar[7].



Fig.1: Sketch Map of the area under study (Kurdistan Region)

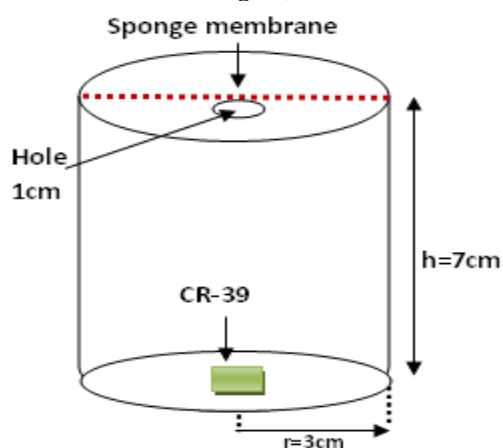


Fig.2: Schematic diagram of the optimum Radon.

2.3. Distribution of radon dosimeters

The dosimeters have been distributed inside 8 Government hospitals in Iraqi Kurdistan. The dosimeters installed on top about 2 m and for three floors in each hospital. Thus, the total dosimeters were 400 dosimeters. After an exposure time of 90 days, the detectors were collected and chemically etched using 6N NaOH at 70± 0.1°C for 10 h. The counting of alpha damage tracks was done using an optical microscope with a magnification of 400X. The correction was applied for the background alpha tracks in CR-39 plastic by subtracting the number of tracks observed in the unexposed detector. The number of tracks counted per unit area is proportional to the indoor radon concentration (Bq.m⁻³) and the exposure time.

2.4. Calculation of Annual Effective Dose

The effective dose (H_E) (mSv/Y) to the personal work of the hospitals was calculated from the following formula according [9]:

$$H_E = C \times F \times O \times T \times D \tag{1}$$

Where C is the radon concentration in Bq.m⁻³, F equilibrium factor, O for occupancy factor (0.8), T for time (8760 h.y⁻¹) and D for dose conversion factor (9 x 10⁻⁶ mSv.h⁻¹ (Bq.m⁻³)⁻¹) [9].

3- Results and discussion

Average value of indoor radon concentration (C_{Rn}), potential alpha energy concentration (PAEC), equilibrium factor (F) and annual effective dose (H_E) inside 8 Iraqi Kurdistan hospitals summarized in Table 1. Fig.3 and Fig. 4 shows the distribution of radon concentration and annual effective dose inside the hospitals. The highest indoor radon concentration was found in

Shahid Dr.Aso hospital in Sulaymaniya city (52.89±3.52 Bq.m⁻³). Lowest indoor radon concentration was found in Erbil Teaching hospital in Erbil city (30.15±2.85 Bq.m⁻³, 0.81 mSv/y). This refer to the different building material, ventilation rate, and the geological formation. The geological formation of Erbil governorate different than the geological formation of Duhok and Sulaymaniya. More details about geological formation are listed in Table 2 [10].

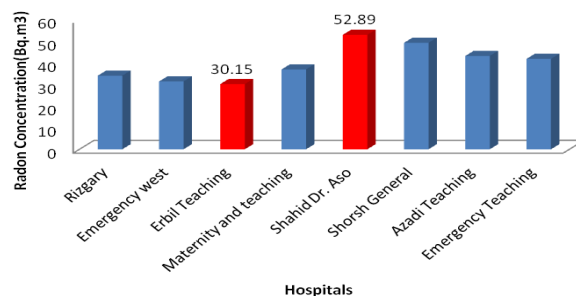


Fig. (3) Distribution of Radon Concentration Inside Government Hospitals in Iraqi Kurdistan

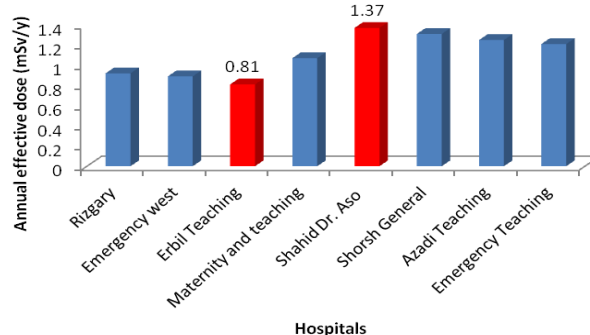


Fig. (4) Distribution of Annual Effect Dose Inside Government Hospitals in Iraqi Kurdistan

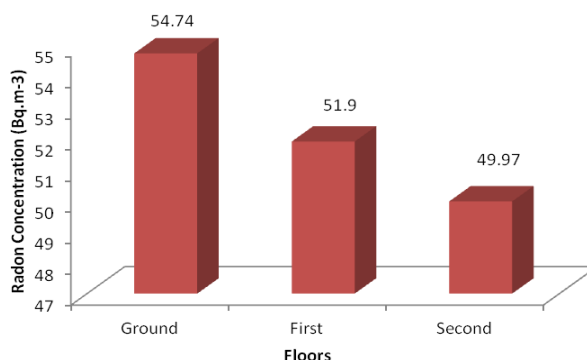


Fig. (5) Variation of radon concentration with floor levels in Shahid Aso Hospital

Table 3 shows the maximum and minimum radon concentration and annual effective dose for each level. The highest average radon concentration and annual effective dose was found in ground floor in the Shaheed Dr.Aso hospital in Sulaymaniya city (54.70±1.96 Bq. m⁻³, 1.43± 0.09 mSv/y). The lowest was found in second floor in the Rizgary Teaching hospital in Erbil city (30.86 ±2.05 Bq. m⁻³, 0.85± 0.03 mSv/y), as shown in Fig.5 and Fig. 6. Average indoor radon concentration decreases as the floor level increases, this due to the reduced effect of radon exhalations from the ground. This variation may be attributed to how close or how far the floor is from ground since soil represents the main source of indoor radon.

Table 1: Radon Concentration, Equilibrium Factor, PAEC and annual effective dose inside hospitals in Iraqi Kurdistan Region

City	Hospital	Equilibrium Factor (F)	PAEC (mWL)	Annual effective dose (mSv/y)	Radon Concentration (Bq.m-3)
Erbil	Rizgary	0.431±0.072	3.964±0.92	0.925±0.12	34.03±3.32
	Emergency west	0.452±0.064	3.828±0.58	0.893±0.084	31.34±2.77
	Erbil Teaching	0.428±0.048	3.487±0.46	0.813±0.088	30.15±2.85
	Maternity and teaching	0.462±0.084	3.607±0.24	1.075±0.11	36.90±3.12
Duhok	Azadi Teaching	0.555±0.018	6.46±0.78	1.5±0.098	43.12±2.87
	Emergency Teaching	0.516±0.008	5.82±0.62	1.35±0.11	41.78±2.27
Sulaymaniya	Shahid Dr. Aso	0.411±0.005	5.87±0.88	1.37±0.092	52.89±3.52
	Shorsh General	0.425±0.004	5.65±0.64	1.31±0.16	49.25±2.22


Table 2: Geological formation of Iraqi Kurdistan region as related to the case study

Regions	Hospital	Equilibrium Factor (F)	Building materials
Erbil	Rizgary	Region consists of the plains and hills. It consists of sandstone, limestone and shale	clay brick, cement concrete, gypsum and gypsum board
	Emergency west		
	Erbil Teaching		
	Paediatric		
Duhok	Azadi Teaching	Region consists of the plains, sediment logical and mountains. It consists of marly limestone, calcarenite shale, sand, limestone and conglomerate	clay brick limestone bricks , cement gypsum and gypsum board
	Emergency Teaching		
Sulaymaniya	Shahid Dr. Aso	Region consists of the Rocky Mountains and valleys. It consists of rocks, limestone, conglomerate, biogenic limestone, pebbly, calcarenite and sandstone	clay brick limestone bricks , cement concrete, gypsum and gypsum board
	Shorsh General		

Table 3: Indoor radon concentration and Annual effective dose for different floors in inside hospitals in Iraqi Kurdistan Region

Hospitals	Levels	Radon Concentration (Bq.m-3)			Annual effective dose (mSv/y)		
		Min	Max	Average	Min	Max	Average
Rizgary (Erbil)	Ground	35.21±0.16	39.80±0.48	37.5±2.29	0.94±0.018	1.08±0.038	1.01±0.07
	First	30.86±0.36	36.62±0.32	33.74±2.88	0.92±0.025	0.96±0.028	0.94±0.02
	Second	28.81±0.42	32.92±0.65	30.86±2.05	0.82±0.022	0.88±0.033	0.85±0.03
Azadi Teaching (Duhok)	Ground	43.92±0.38	48.11±0.48	46.01±2.09	1.25±0.016	1.35±0.024	1.30±0.05
	First	41.06±0.57	45.18±0.64	43.12±2.06	1.16±0.018	1.32±0.018	1.24±0.085
	Second	37.25±0.54	43.22±0.46	40.23±2.98	1.17±0.048	1.25±0.026	1.21±0.04
Shahid Dr. Aso (Sulaymany)	Ground	52.83±0.26	56.75±0.26	54.79±1.96	1.34±0.024	1.52±0.445	1.43±0.09
	First	49.22±0.27	54.58±0.36	51.9±2.68	1.27±0.032	1.38±0.028	1.32±0.055
	Second	47.56±0.18	52.38±0.22	49.97±2.41	1.22±0.016	1.38±0.016	1.30±0.08

In addition, many other reasons such as the fact that upper floors are better ventilated than lower floors that are exposed to dust and other forms of contaminations.

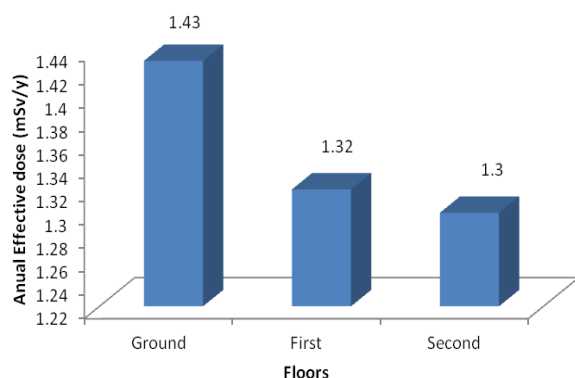**Fig. (6) Variation of Annual effective dose with floor levels in Shahid Dr. Aso Hospital**

4- Conclusion

Indoor radon concentrations have been measured inside 8 government hospitals in Iraqi Kurdistan region in summer

season. Floor levels and geological formation of the Iraqi Kurdistan hospitals affect on the concentrations of indoor radon and its progeny. Locations of the selected hospitals had different geological formation and located in three main governorates: Erbil, Duhok and Sulaymaniya. The highest average radon concentration value and annual effective dose was found to be in the Shaheed Dr.Aso hospital in Sulaymaniya city (52.89±3.52 Bq.m⁻³, 1.37±0.09 mSv/Y). The lowest was found in the Erbil Teaching hospital in Erbil city (30.15±2.85 Bq.m⁻³, 0.81 mSv/Y). The average indoor radon concentration decreases as the floor level increases, the highest radon concentration and annual effective dose was found in the ground floor and lowest was found in the second floor level in addition to many other reasons such as the fact that upper floors are better ventilated than lower floors that.

References

- [1] International Commission on Radiation Protection (ICRP), 1987. Lung Cancer Risk from Indoor Exposure to Radon Daughters Oxford. ICRP Publication. 50 17(1).
- [2] International Commission on Radiological Protection ICRP, (1984). Non-stochastic Effects of Irradiation. ICRP Publication 41. Ann. ICRP. 14.

- [3] Ismail A H and Jaafar M S. (2011). Interaction of low-intensity nuclear radiation dose with the human blood: Using the new technique of CR-39NTDs for an in vitro study. *Applied Radiation and Isotopes*. 69(3) p.559-566.
- [4] Ismail A H and Jaafar M S. (2010). Indoor radon concentration and its health risks in selected locations in Iraqi Kurdistan using CR-39 NTDs. The 4th International conference on Bioinformatics and Biomedical Engineering (iCBBE 2010) . 18-20 June. Chengdu-China. ©2010 IEEE
- [5] Ismail A H and Jaafar M S. (2010). Relationship between radon concentration, ventilation rate and male infertility: A Case study in Iraqi Kurdistan. *International Journal of Low Radiation* .7(3) p.175-187.
- [6] Ismail A H and Jaafar M S. (2011). Design and construct optimum dosimeter to detect airborne radon and thoron gas: Experimental study. *Nuclear Instruments and Methods in Physics Research B*. 269(4) p. 437–439
- [7] Bochicchio, F., (2005). Radon epidemiology and nuclear track detectors: methods, results and perspectives. *Radiat. Meas.* 40, 177–190.
- [8] Somlai J , Szeiler G , Szabo P. (2009). Radiation dose of workers originating from radon in the show cave of Tapolca, Hungary. *J. of Radio analytical and Nuclear Chemistry*. 279(1) p.219–225.
- [9] UNSCEAR, 2000. Sources and Effects of Ionizing Radiation. In: Report to the General Assembly with Scientific Annexes, vol. I. United Nations Scientific Committee on the Effects of Atomic Radiation, United Nations, New York (Sources).
- [10] Kamal H. K. and Ali M.S. (2004). Geological formation in Iraqi Kurdistan : (KAJ) *Kurdistan Academicians Journal*, 4(1) part A p. 19-39.